



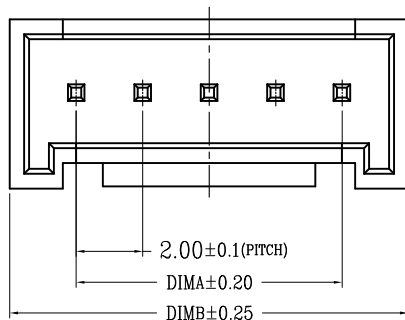

REV. LTR.	DESCRIPTION	APPROVAL	DATE
A2	Update drawing	W. Q. LI	2024.06.06



Specifications:

1. Voltage rating:250V AC/DC.
2. Current rating:2.0A AC/DC.
3. Withstanding voltage:1000V AC/minute.
4. Ambient temperature range:-40 ~ +85℃.
5. Insulation resistance: $\geq 1000M\Omega$.
6. Contact resistance: $\leq 20m\Omega$.
7. Applicable wire Sizes:AWG#22 ~ #28.
8. Housing①:PA66 UL94-0 White.
9. Upper terminal②:Brass/Tin Plating.

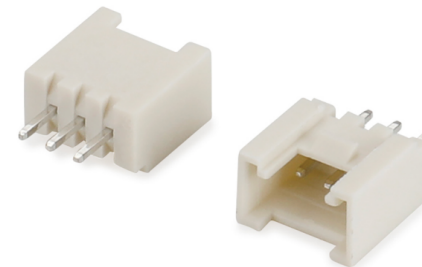


Product material No:
EN200KLC-**-* * *-*

NO OF Poles	}	}	Packing
Terminal Plating			T=Tube
B=Bright-Tin			B=Bag
M=Mist-Tin			R=Tape&Reel
G=Gold flash			Plastic Color
Plastic Material	}	}	Y=Faint Yellow
P=PA6T			R=Red
T=PA9T			B=Black
L=LCP			W=White

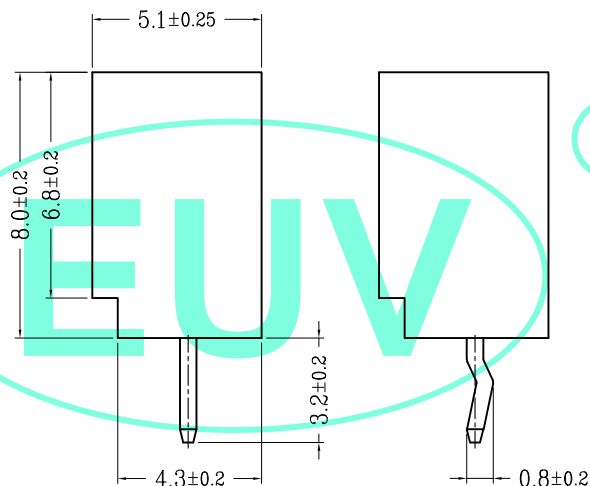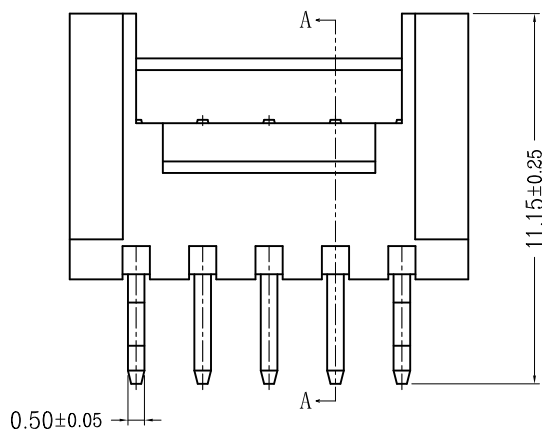


TYPE 1 (无K脚)

TYPE 2(打K脚)

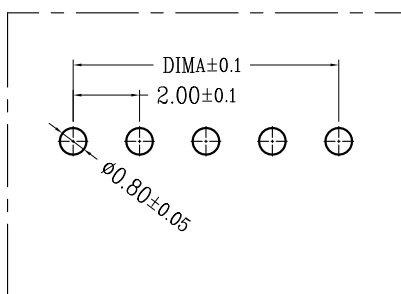

Recommended P.C.B Layout
General Tolerance ± 0.05

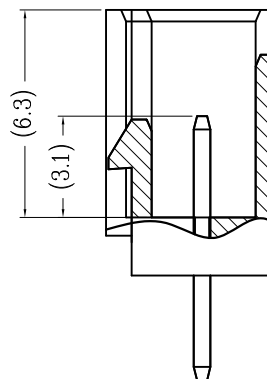

SECTION A-A

http://www.euvchn.com		 EUV ELECTRONICS CO.,LTD 兆進電子有限公司			
30~Above ±0.30	ANGLE: $\angle \pm 1^\circ$	TITLE		2.00mm Connectors (180° SMT)	
10~30 ±0.20	SCALE: 1:1	PART NO.		EN200KLC-**-***-*	
5~10 ±0.15	SHEET: 1 OF 1	PROJECT 		APPROVAL	
0~5 ±0.10	PROJECT 	CHECK	DRAWN	DATE	
TOLERANCES ARE /UNIT: mm	SIZE: A4	W. Q. LI	X. H. LIN	K. J. ZENG	2024. 06. 06