

REV. LTR.	DESCRIPTION	APPROVAL	DATE
A2	Update drawing	W. Q. LI	2024.06.06

Specifications:

1. Voltage rating:250V AC/DC.
2. Current rating:3.0A AC/DC.
3. Withstanding voltage:800V AC/minute.
4. Ambient temperature range:-40~+85℃.
5. Insulation resistance: $\geq 1000M\Omega$.
6. Contact resistance: $\leq 20m\Omega$.
7. Applicable wire Sizes:AWG#22~#28.
8. Housing①:PA6T UL94-0 Natural.
9. Upper terminal②:Brass/Tin Plating.
10. Fitting Nail③:Brass/Tin Plating.



Outside drawing

Product material No:

EN200RWT-**-**-**

NO OF Poles

Terminal Plating

B=Bright-Tin

M=Mist-Tin

G=Gold flash

Plastic Material

P=PA6T, T=PA9T

L=LCP

Packing

T=Tube

B=Bag

R=Tape&Reel

Plastic Color

Y=Faint Yellow




R=Red

B=Black

W=White

Pin number:


Poles	DIM A	DIM B	DIM C	DIM D
2P	2.00	4.55	7.95	6.10
3P	4.00	6.55	9.95	8.10
4P	6.00	8.55	11.95	10.10
5P	8.00	10.55	13.95	12.10
6P	10.00	12.55	15.95	14.10
7P	12.00	14.55	17.95	16.10
8P	14.00	16.55	19.95	18.10
9P	16.00	18.55	21.95	20.10
10P	18.00	20.55	23.95	22.10
11P	20.00	22.55	25.95	24.10
12P	22.00	24.55	27.95	26.10
13P	24.00	26.55	29.95	28.10
14P	26.00	28.55	31.95	30.10

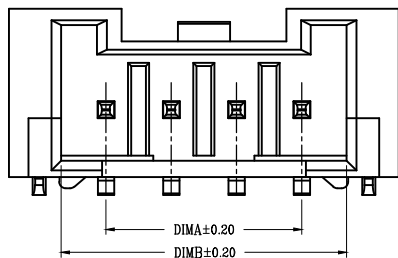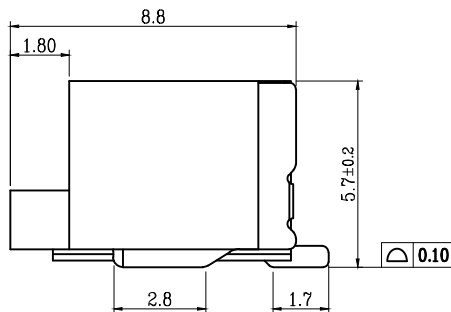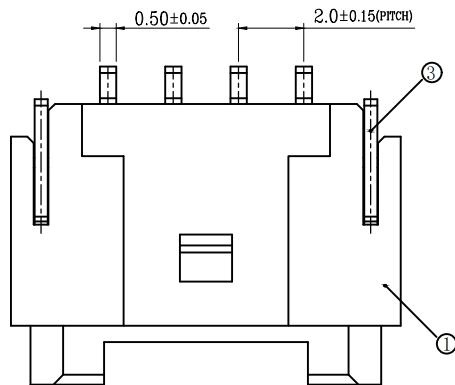

Mylar

3P贴Mylar示意图

2P贴Mylar示意图

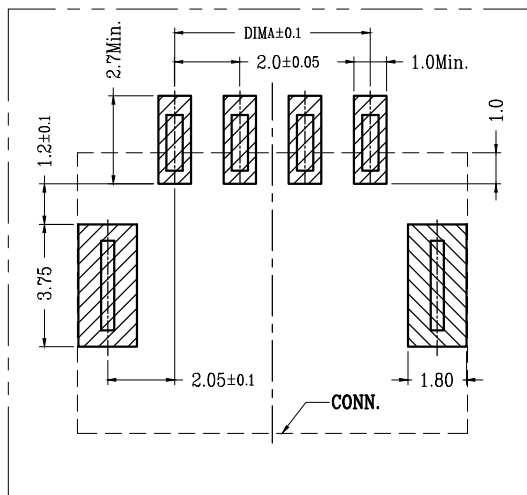

Recommended P.C.B Layout

General Tolerance±0.05

